


**Description:**

Belonging to the **Firefly Family** range, the Firefly XL, one of the original Fireflies, offers a simple, clean aesthetic available in various colour temperatures, optics, finishes and control options. The Firefly Family offers a variety of products suitable for various applications. The products contain the same LED chip and optics for a consistent approach. Supplied with cable gland and double insulated cable. The Firefly Family also consists of a **Firefly Standard**, **Micro** and **Deco** range creating a full suite of products.

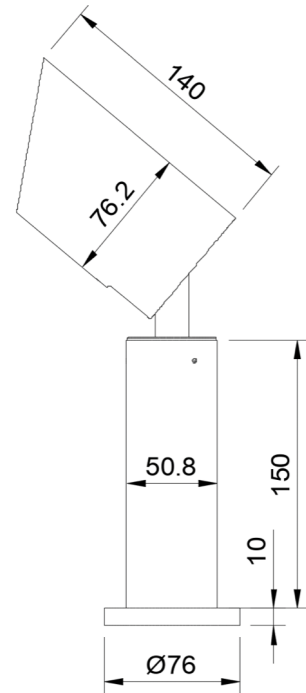

**Technical:**

|                               |                          |                  |                                   |
|-------------------------------|--------------------------|------------------|-----------------------------------|
| LED TYPE                      | VERO 13                  | CONTROL GEAR     | REMOTE                            |
| RATED POWER                   | 18W                      | DIMMING PROTOCOL | DALI - 0-10V - PHASE DIM - ON/OFF |
| CRI                           | 80                       | CABLE LENGTH     | 500MM STANDARD LENGTH             |
| BEAM ANGLES                   | NOMINATED IN TABLE BELOW | MOUNTING OPTIONS | SURFACE MOUNTED                   |
| INPUT POWER / FORWARD VOLTAGE | 500mA / 36V              | WEIGHT           | 1-2KG                             |
| NOMINAL LUMENS                | 1200lm                   | HARDWARE         | GLASS LENS, O-RING, GLAND, CABLE  |
| IP RATING                     | IP65                     | CONSTRUCTION     | MACHINED METAL & HEATSINK         |
| COLOUR TEMPERATURE            | 2700K - 3000K - 4000K    | WARRANTY         | 2 YEARS                           |

**Product Generator:** example 7031-PB-M-30-F-14W-1-2

| Model  | Finish           | Beam Angle   | CCT      | Mounting | Wattage    | Dimming  | Accessory                 |
|--------|------------------|--------------|----------|----------|------------|----------|---------------------------|
| NL7031 | AB Aged Brass    | N Narrow 10° | 27 2700K | F Floor  | 18W /500mA | 1 DALI   | 1 Honeycomb Louver        |
|        | BR Brushed Brass | M Medium 21° | 30 3000K |          |            | 2 0-10V  | 2 Diffuser Lens           |
|        | PB Black         | W Wide 33°   | 40 4000K |          |            | 3 Phase  | 3 Elliptical Lens 26°x41° |
|        | PW White         |              |          |          |            | 4 On/Off |                           |
|        | CC Custom        |              |          |          |            |          |                           |

|        |   |  |   |  |   |  |   |  |
|--------|---|--|---|--|---|--|---|--|
| NL7031 | - |  | - |  | - |  | - |  |
|--------|---|--|---|--|---|--|---|--|