


Description:

Low Profile Surface mounted Direct Wall Light, Various colour temperatures, IP65, finished in machined solid Brass (Aged) or 6061 Aluminium (Powder Coated), UV stabilized frosted acrylic diffuser, pre-fitted 300 mm lead, remote 24VDC constant voltage, 'Universal Mount Plate'

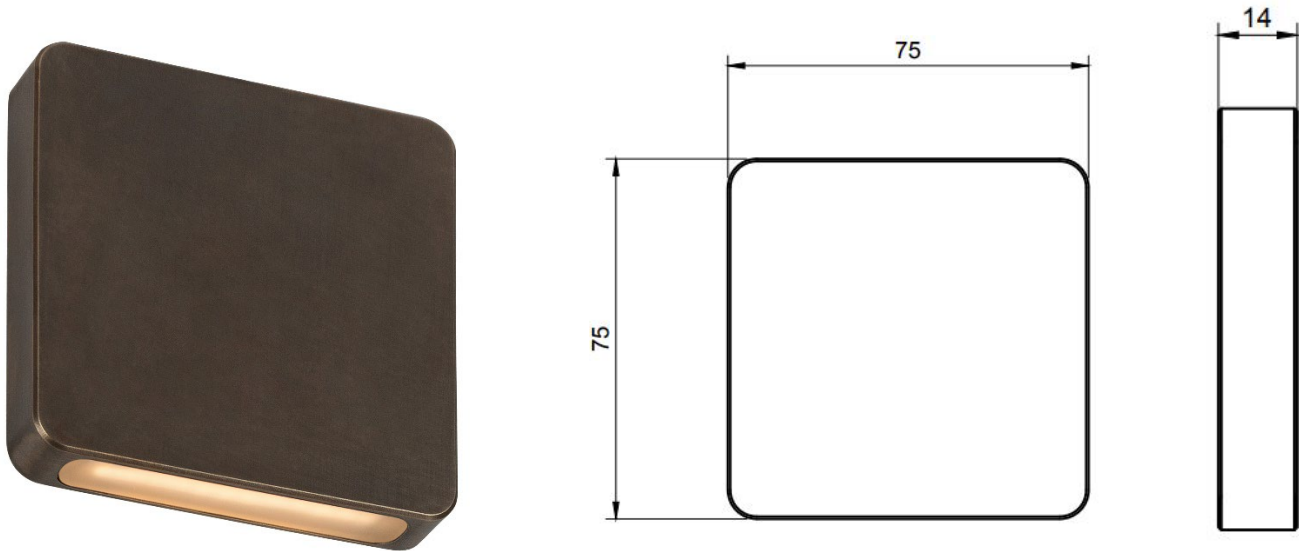

Technical:

LED TYPE	Pyramid PL-2W-CV-55	CONTROL GEAR	Remote
RATED POWER	2W	DIMMING PROTOCOL	DALI - 0-10V – Phase Dim - On/Off
CRI	80	CABLE LENGTH	300 mm
BEAM ANGLES	Diffused	MOUNTING OPTIONS	Surface
INPUT POWER	24V DC	WEIGHT	0.7 kg
DELIVERED LUMENS	94	HARDWARE	Universal Mounting Plate, O-ring, Gland, Cable
IP RATING	IP65	CONSTRUCTION	Machined metal, & Heat shrink
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 Years

Product Generator: example NL-1526CV-AB-D-30-W-2W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL-1526CV	AB Aged Brass	D Diffused	27 2700K	SM Surface	2W/24V DC	DALI	N/A
	BR Brushed Brass		30 3000K			0-10V	
	PD Black		40 4000K			Phase	
	PW White					On/Off	
	CC Custom						

NL-1526CV		D		SM			N/A
-----------	--	---	--	----	--	--	-----