


Description:

Architectural, a member of the Firefly family, Firefly Wall Fixed Down offers a clean aesthetic available in various colour temperatures, optics, finishes and control options. Firefly Wall Fixed Down shares the same technical features as the remainder of the Firefly family ensuring consistent illumination whilst being controllable to produce the desired ambiance. A luminaire that provides the sought after energy efficiency and luminaire longevity.

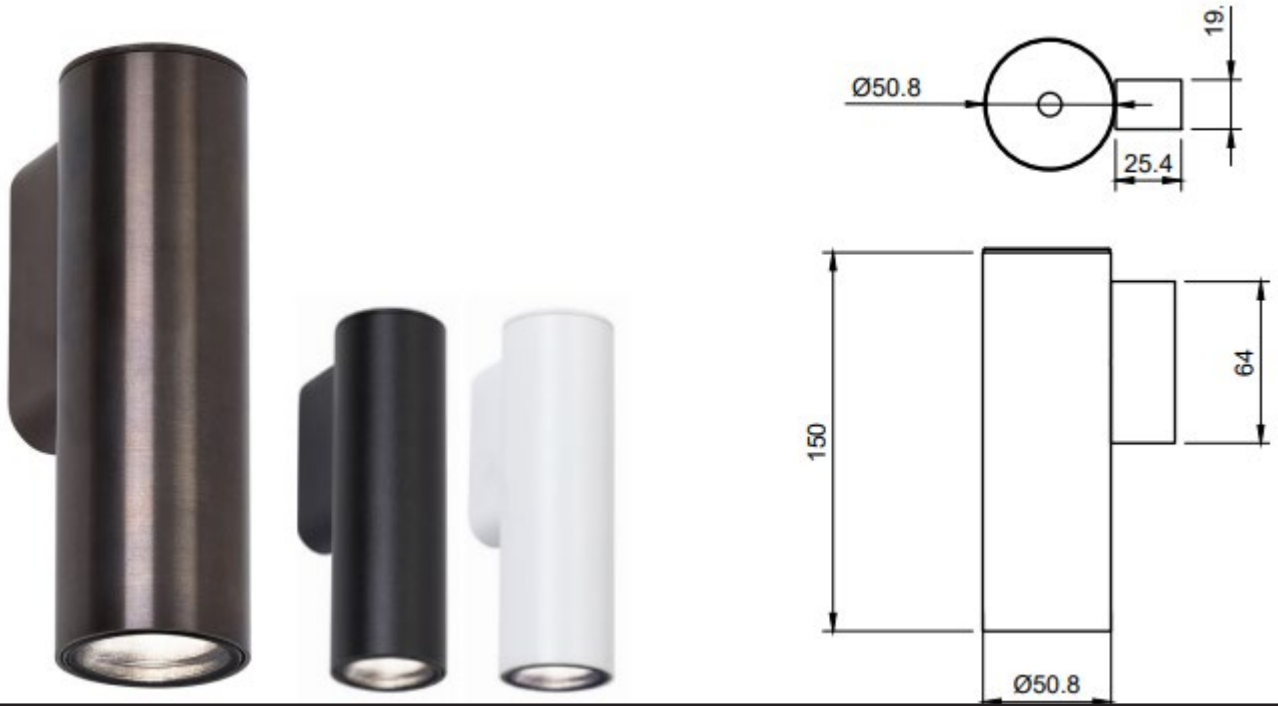

Technical:

LED type	XHP50 Gen 2	Control gear	Remote
Rated power	4w – 6W – 9W	Dimming protocols	Dali, 0-10V, Phase Dim, On/Off
CRI	80	Cable length	300 mm
Beam angles	Nominated in table below	Mounting options	Surface mounted
Input power	6V/ Nominated in the table below.	Weight	On request
Nominal lumens	300lm – 476lm – 780lm	Hardware	Glass lens, O-Ring, Gland, Cable
IP rating	IP65	Construction	Machined metal, glass lens
Colour temperature	2700K – 3000K – 4000K	Warranty	Two years

Product Generator: example NL-7007-AB-M-30-SM-6W-3-HC

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessories
NL-7007CC	AB Aged brass	N Narrow 10°	27 2700K	SM Surface mount	4W/350 mA	1 Dali	HC Honeycomb louver
	BR Brushed brass	M Medium 21°	30 3000K		6W/700 mA	2 0-10V	DL Diffuser lens
	PB Black	W Wide 33°	40 4000K		9W/1050mA	3 Phase	
	PW White	E Elliptical 26 x 41°				4 On/Off	
	CC Custom						
NL-7007CV	AB Aged brass	N Narrow 10°	27 2700K	SM Surface mount	4W/24V DC	1 On/Off	HC Honeycomb louver
	BR Brushed brass	M Medium 21°	30 3000K		6W/24V DC		DL Diffuser lens
	PB Black	W Wide 33°	40 4000K		9W/24V DC		
	PW White	E Elliptical 26 x 41°					
	CC Custom						

Order Code

NL-7007__				SM			
-----------	--	--	--	----	--	--	--