


**Description:**

Surface mounted Direct / Indirect Wall Light, 1W or 3W CREE XLAMP XP-G3, various colour temperatures, IP65, finished in Machined 6061 Aluminium (Powder Coated or Electroplated Aged Brass Finish), Borosilicate Glass Lens, pre-fitted Honey Comb Baffle, Resin sealed cable entry, pre-fitted 500mm exterior rated lead, remote driver Constant Current, 'Covert Mounting System'.

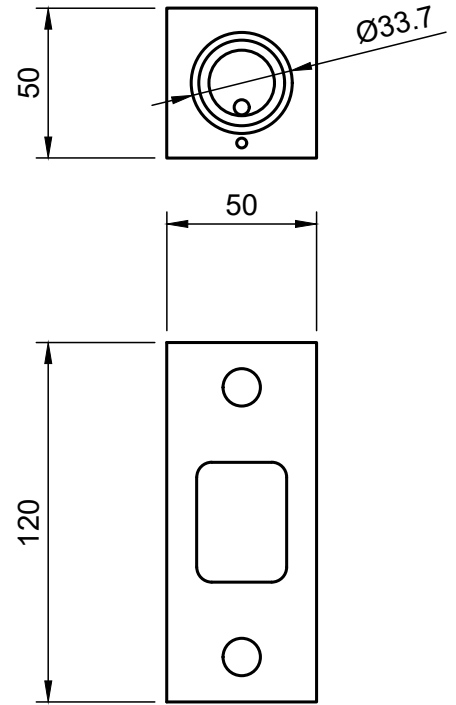

**Technical:**

LED TYPE	CREE XLAMP XP-G3	CONTROL GEAR	REMOTE
RATED POWER	2x 1W or 3W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE WALL
INPUT POWER / FORWARD VOLTAGE	350mA or 700mA / 6V	WEIGHT	0.8KG
NOMINAL LUMENS	2x 155lm or 285lm	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP65	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

**Product Generator:** example 5005-PB-M-30-W-3W-DALI-HC

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL5005	AB Aged Brass	N Narrow 10°	27 2700K	W Wall Mounted	1W / 350mA	DALI	HC Honeycomb Louver
	BR Brushed Brass	M Medium 21°	30 3000K		3W / 700mA	0-10V	DL Diffuser Lens
	AD Black	W Wide 33°	40 4000K			Phase	
	PW White					On/Off	
	CC Custom						

NL5005	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---