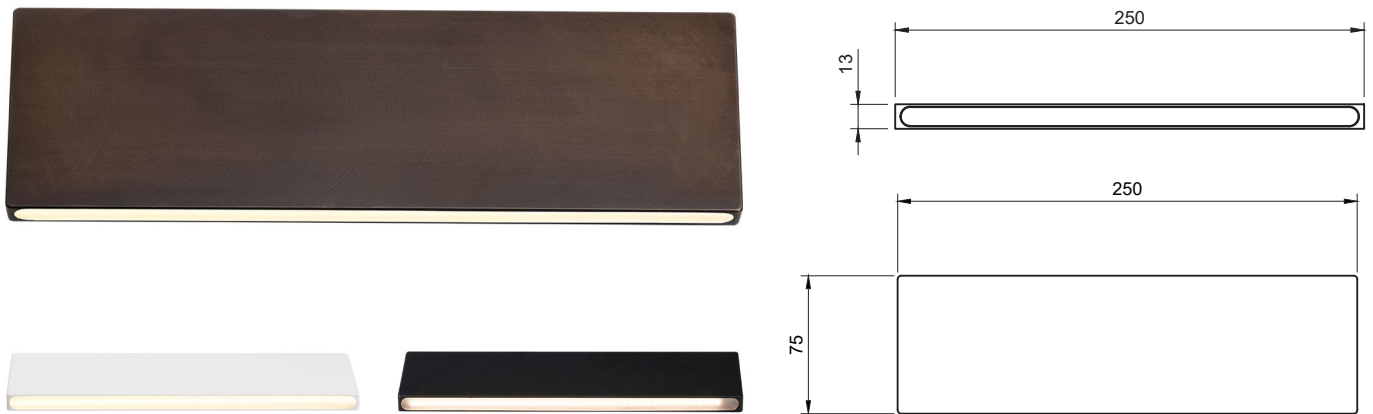


Description:

Low Profile Surface mounted Direct Wall Light, Various colour temperatures, IP54, finished in machined solid Brass (Aged) or 6061 Aluminium (Powder Coated), UV stabilized frosted Acrylic diffuser, pre-fitted 500mm lead, remote 24VDC constant voltage, 'Covert Mounting System'


Technical:

LED TYPE	COLORS D6240	CONTROL GEAR	REMOTE
RATED POWER	5W	DIMMING PROTOCOL	DALI - 0-10V - PHASE DIM - ON/OFF
CRI	80	CABLE LENGTH	500MM STANDARD LENGTH
BEAM ANGLES	NOMINATED IN TABLE BELOW	MOUNTING OPTIONS	SURFACE
INPUT POWER / FORWARD VOLTAGE	5W / 24V DC	WEIGHT	1.2KG
NOMINAL LUMENS	250lm	HARDWARE	GLASS LENS, O-RING, GLAND, CABLE
IP RATING	IP54	CONSTRUCTION	MACHINED METAL & HEATSINK
COLOUR TEMPERATURE	2700K - 3000K - 4000K	WARRANTY	2 YEARS

Product Generator: example 1545-AB-D-30-W-5W-DALI-N/A

Model	Finish	Beam Angle	CCT	Mounting	Wattage	Dimming	Accessory
NL1545	AB Aged Brass	D Diffused	27 2700K	W Wall Mounted	5W / 24V DC	DALI	N/A
	BR Brushed Brass		30 3000K			0-10V	
	PB Black		40 4000K			Phase	
	PW White					On/Off	
	CC Custom						

NL1545	-	-	-	-	-	-	-
--------	---	---	---	---	---	---	---